


SUPERCONDUCTING QUBITS AS PARTICLE DETECTORS

Francesco De Dominicis




Qubits and Radioactivity

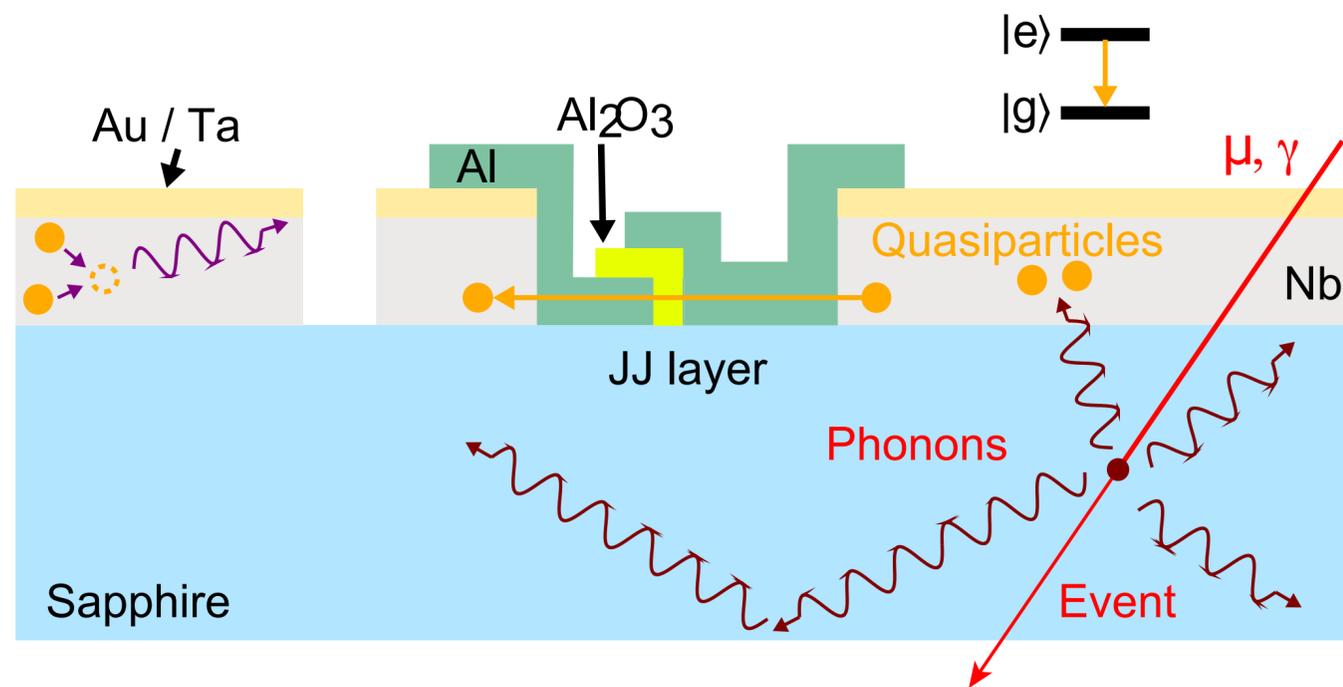

De Dominics et al., arXiv:2405.18355

- Probability for ionizing radiation to produce impacts on the qubit itself is low due to the small dimensions;
- Ionizing radiation, though, can also impact the chip substrate, producing phonons;
- Phonons break Cooper pairs and produce quasiparticles;
- Quasiparticles can be responsible for the loss of coherence.


Qubits and Radioactivity

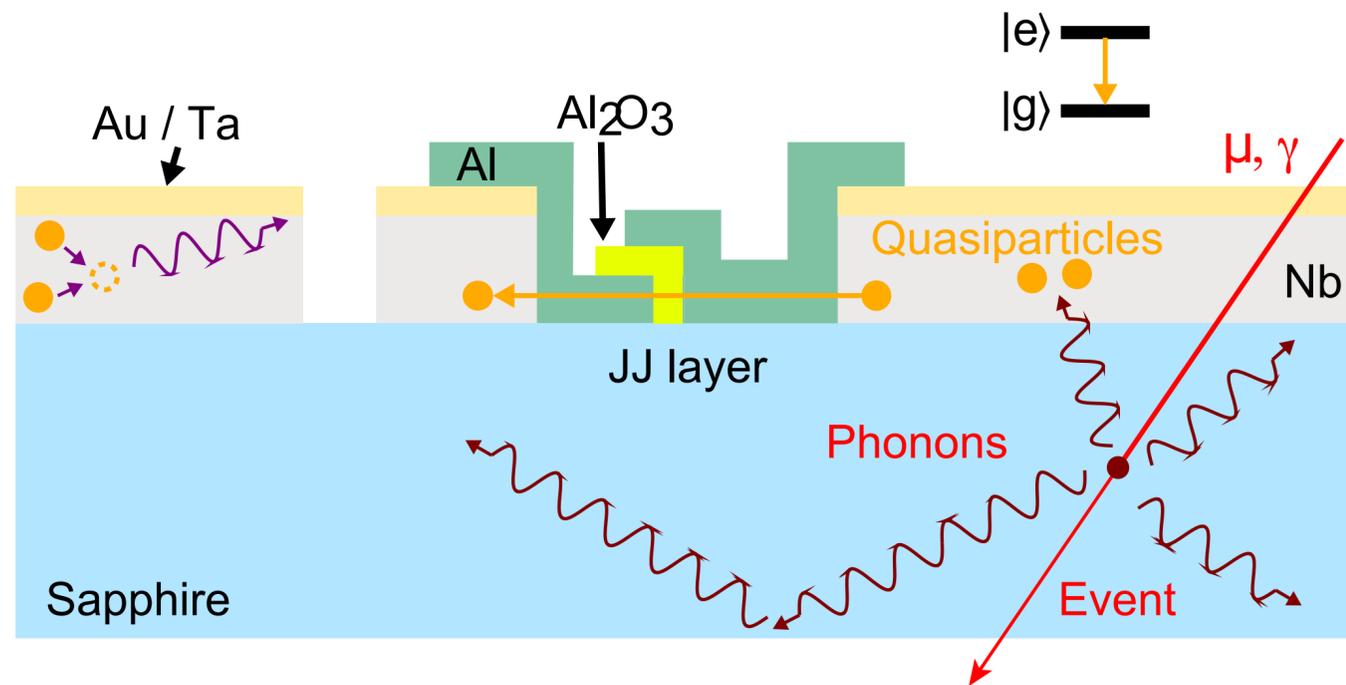

De Dominics et al., arXiv:2405.18355

- Previous researches showed that:
 - Radioactivity affects the performances of superconducting quantum circuits [Cardani et al., *Nature Communications* (2021)];
 - Radioactivity will limit the lifetime of next generation qubits [Vepsäläinen et al., *Nature* (2020)];
 - Radioactivity is a source of correlated errors in multi-qubit chips [Wilén et al., *Nature* (2021), McEwen et al. *Nature Physics* (2022)]

Qubits and Radioactivity

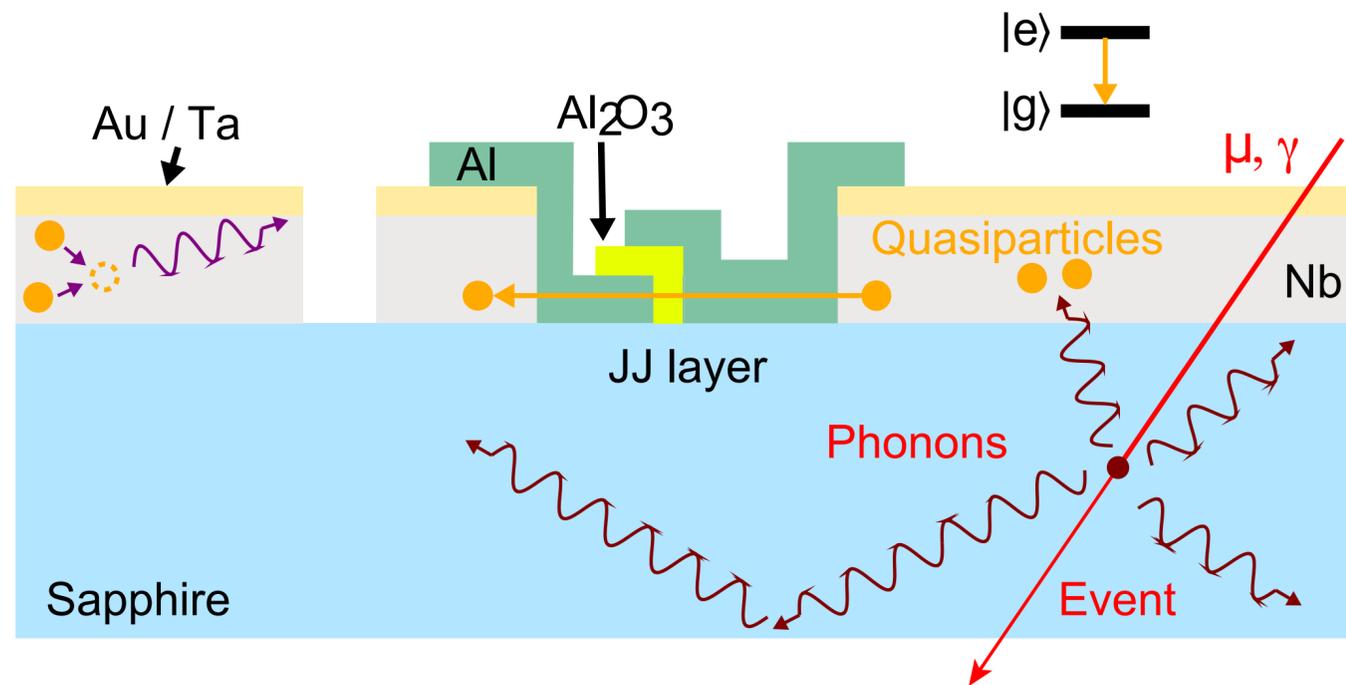


De Dominics et al., arXiv:2405.18355


- Superconducting qubits are indeed sensitive to ionizing radiation;
- Can their sensitivity be useful for particle physics experiment?
- Can we use qubits for particle detection?

How to recognize ionizing radiation

- Qubit dynamics is affected by several phenomena, disentangling radioactivity from the others can be tricky;
- Our approach:
 - Characterize the qubit in a low-radioactivity environment;
 - Expose the qubit to a radioactive source and repeat the measurement;
 - Compare the results.

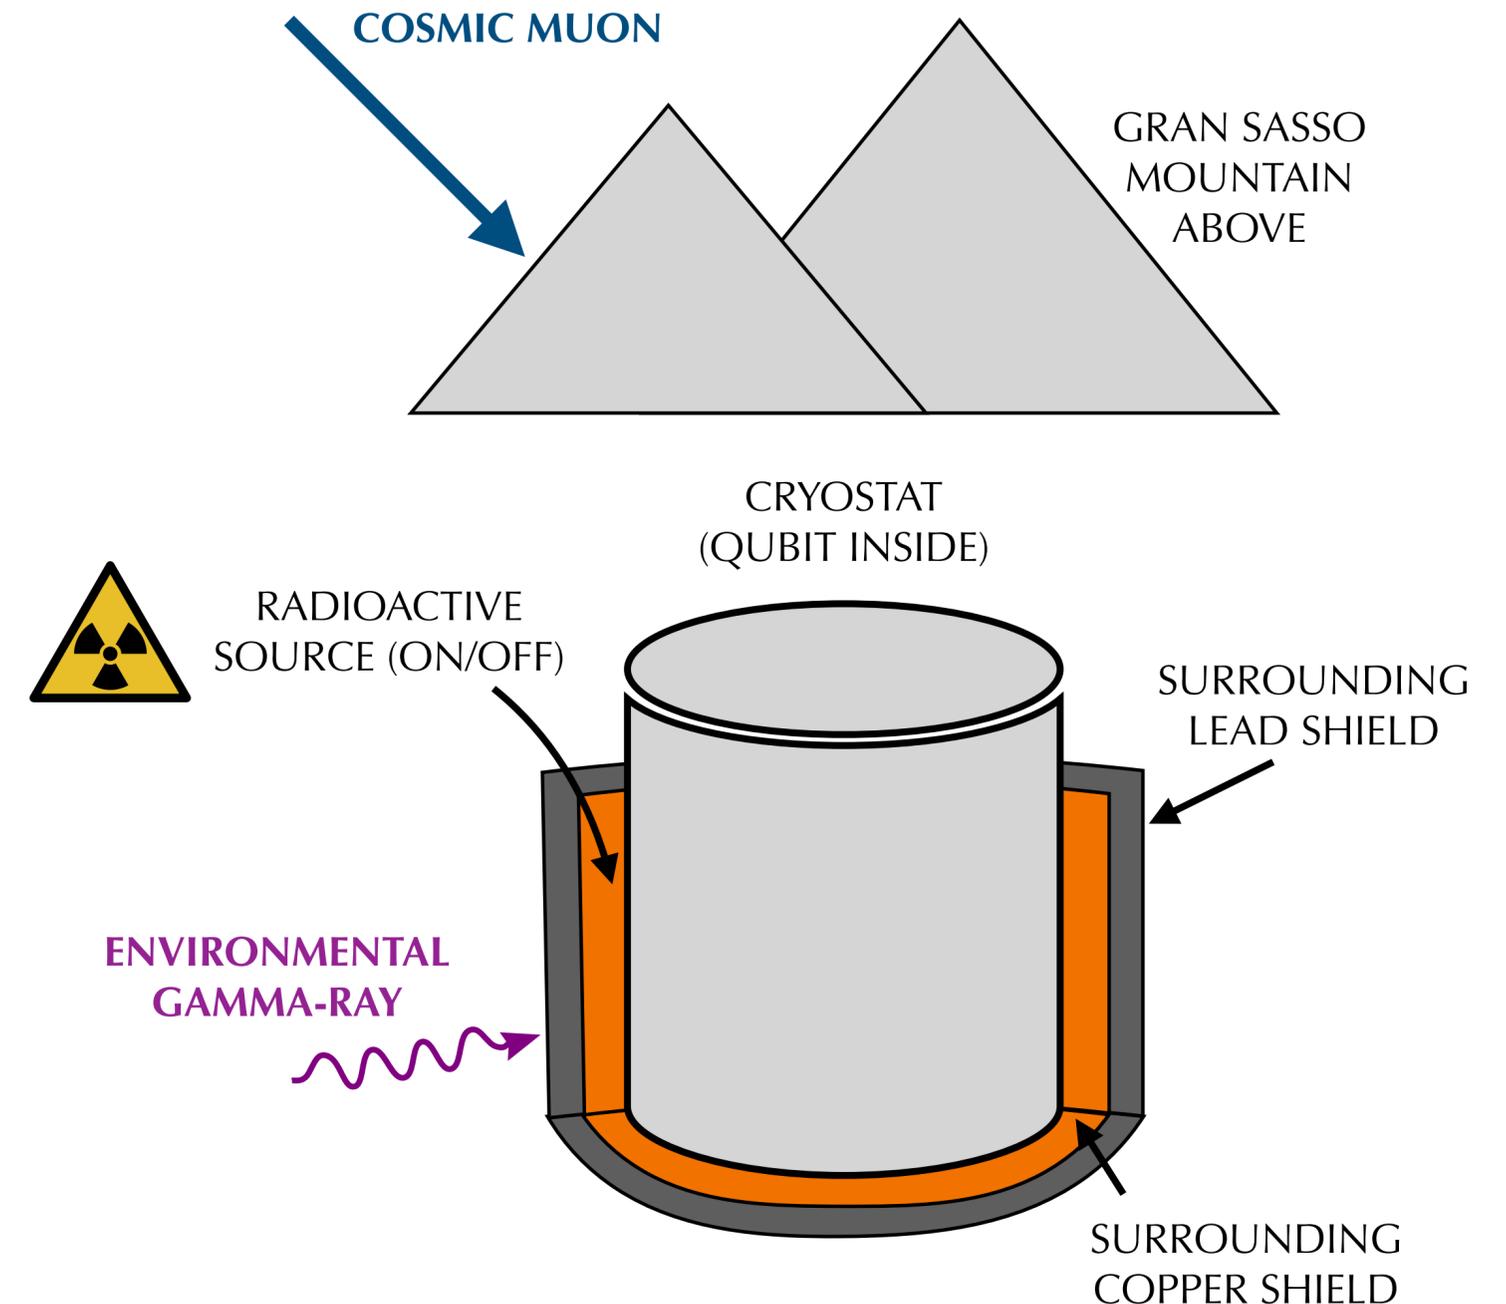


The IETI Underground Facility

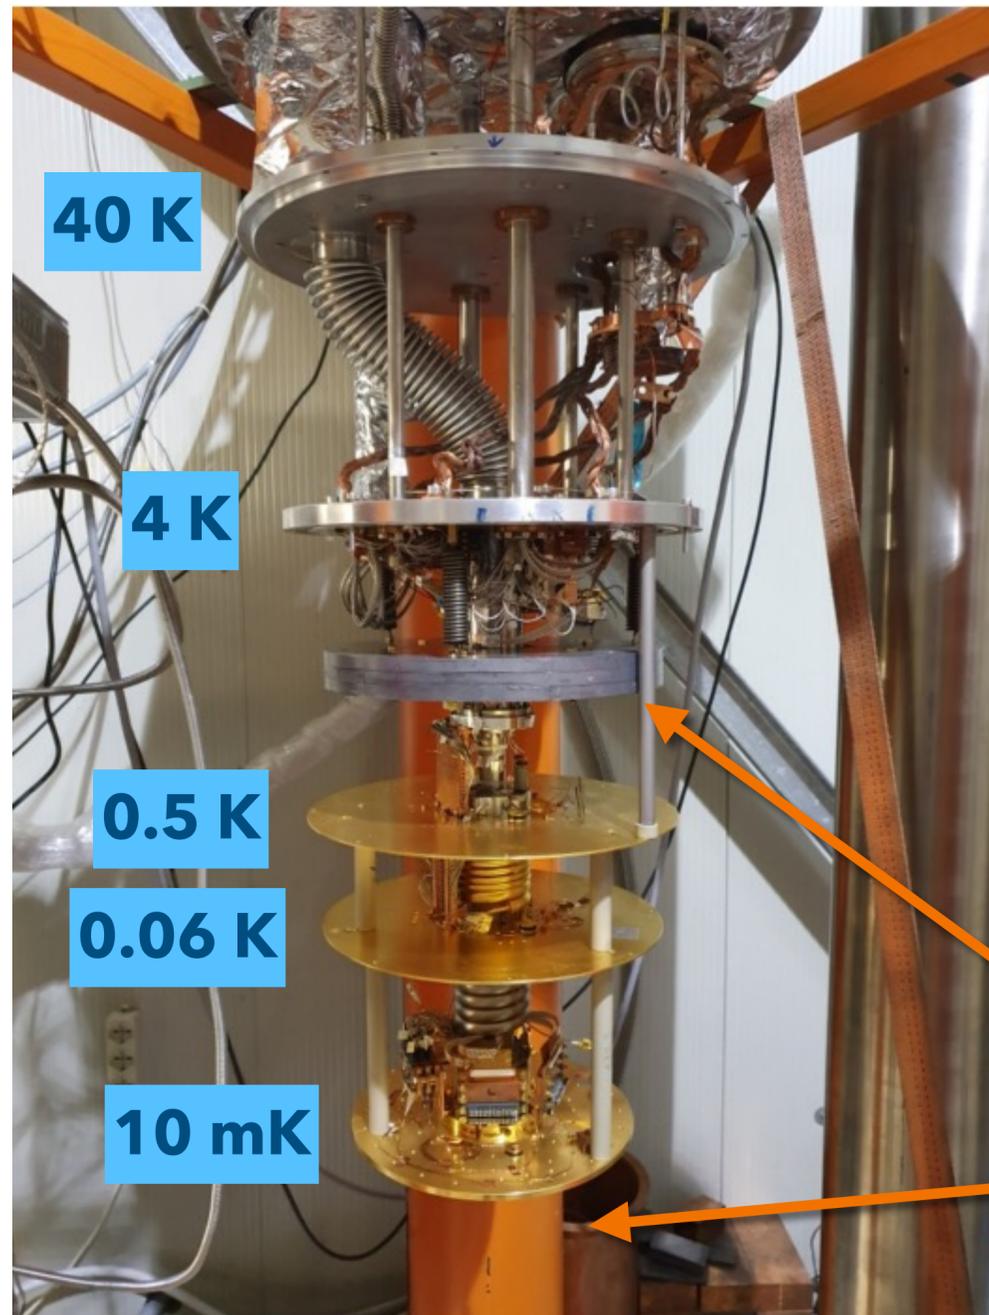


- Hall C of LNGS Underground Laboratories;
- Pulse tube based $^3\text{He}/^4\text{He}$ dilution refrigerator;
- Pulse tube decoupling plus custom-made 3 stages mechanical decoupling system between cold plates and detector;
- 3 cm internal lead at 4K plus additional 3 cm lead at 10 mK.




<https://ieti.sites.lngs.infn.it/index.html>

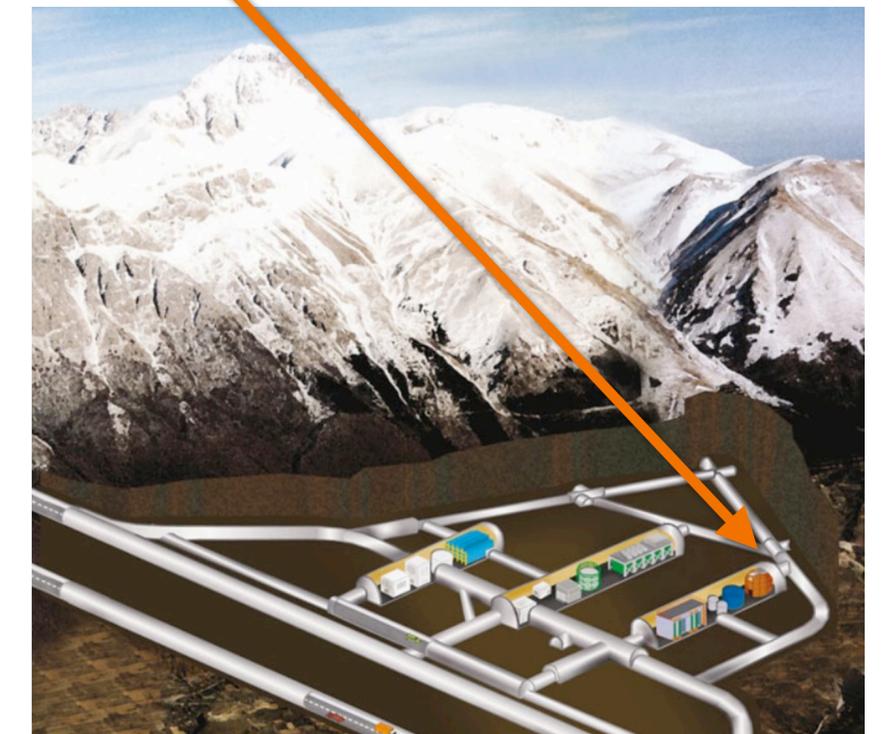

Shielding

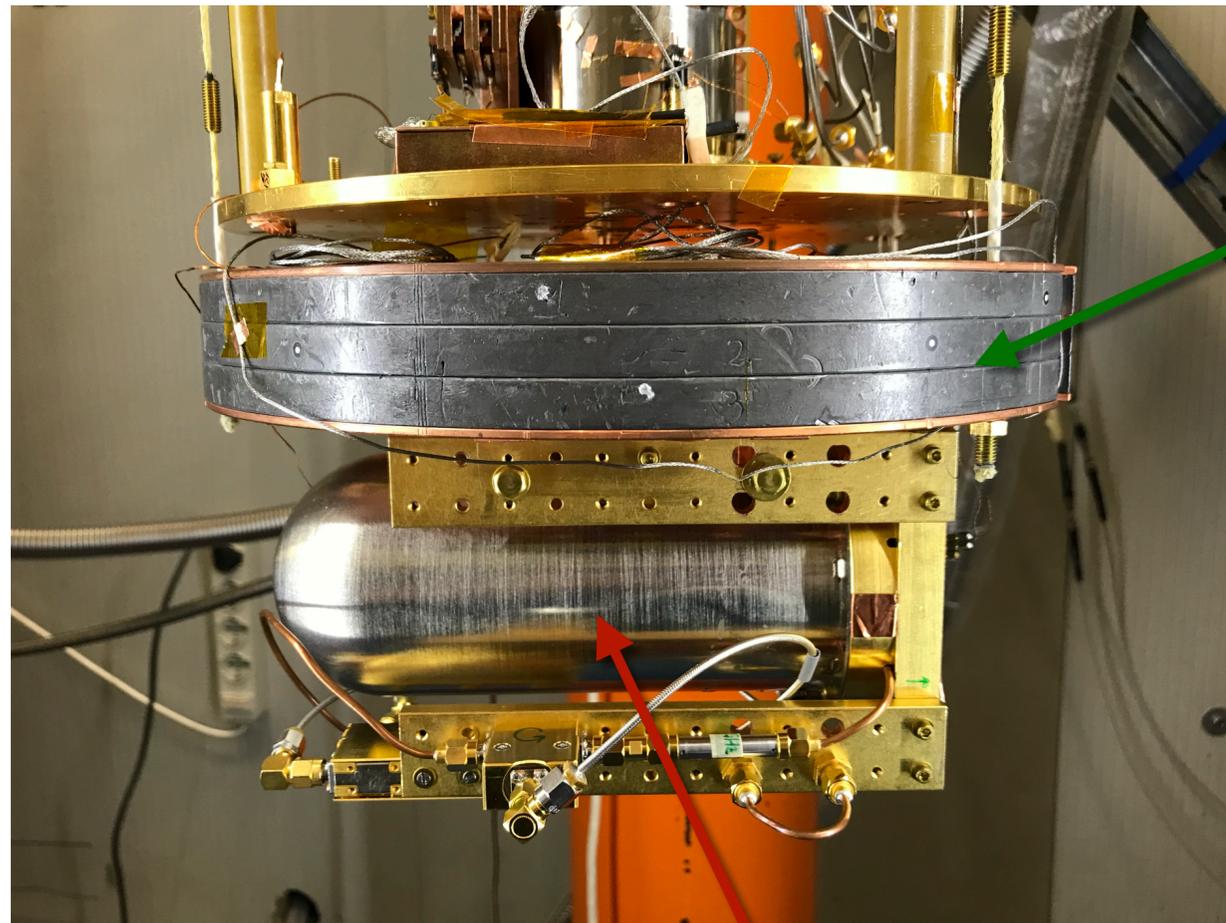

**INNER MAGNETIC SHIELD
(QUBIT INSIDE)**

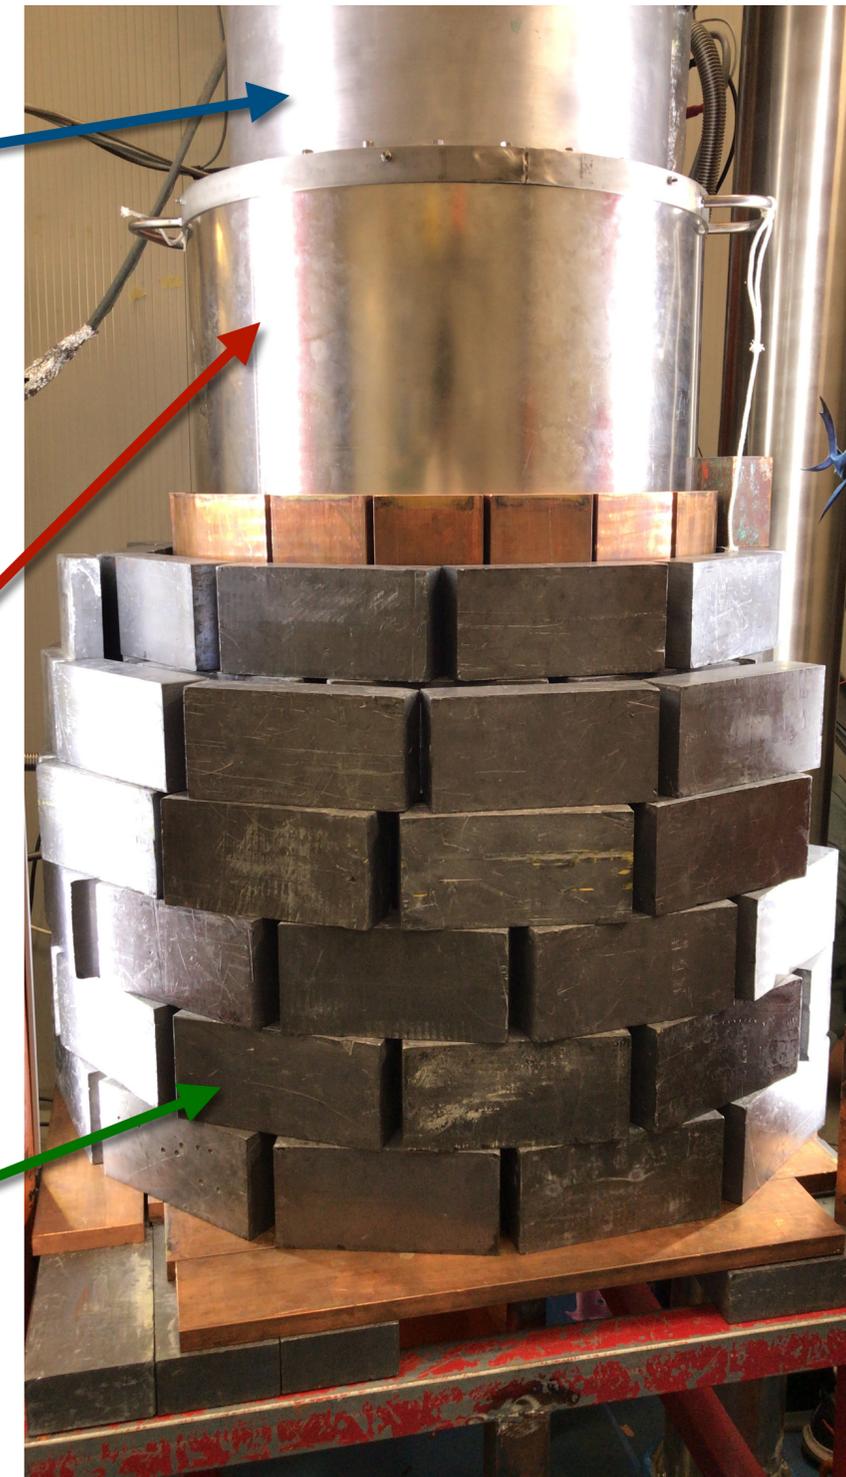

CRYOSTAT

**INNER LEAD
SHIELD**


**EXTERNAL
MAGNETIC
SHIELD**

**EXTERNAL
Pb+Cu SHIELD**

How do we detect ionizing radiation?

- **Measurement protocol:**


- Prepare the qubit in $|e\rangle$;
 - Wait a few μs ;
 - Measure the qubit state.
- Qubit decay time \gg waiting period, so we expect to observe the qubit in $|e\rangle$ most of the times;
 - When the qubit is disturbed by a particle interaction, though, the decay time drops and we observe a stream of $|g\rangle$'s in the data.

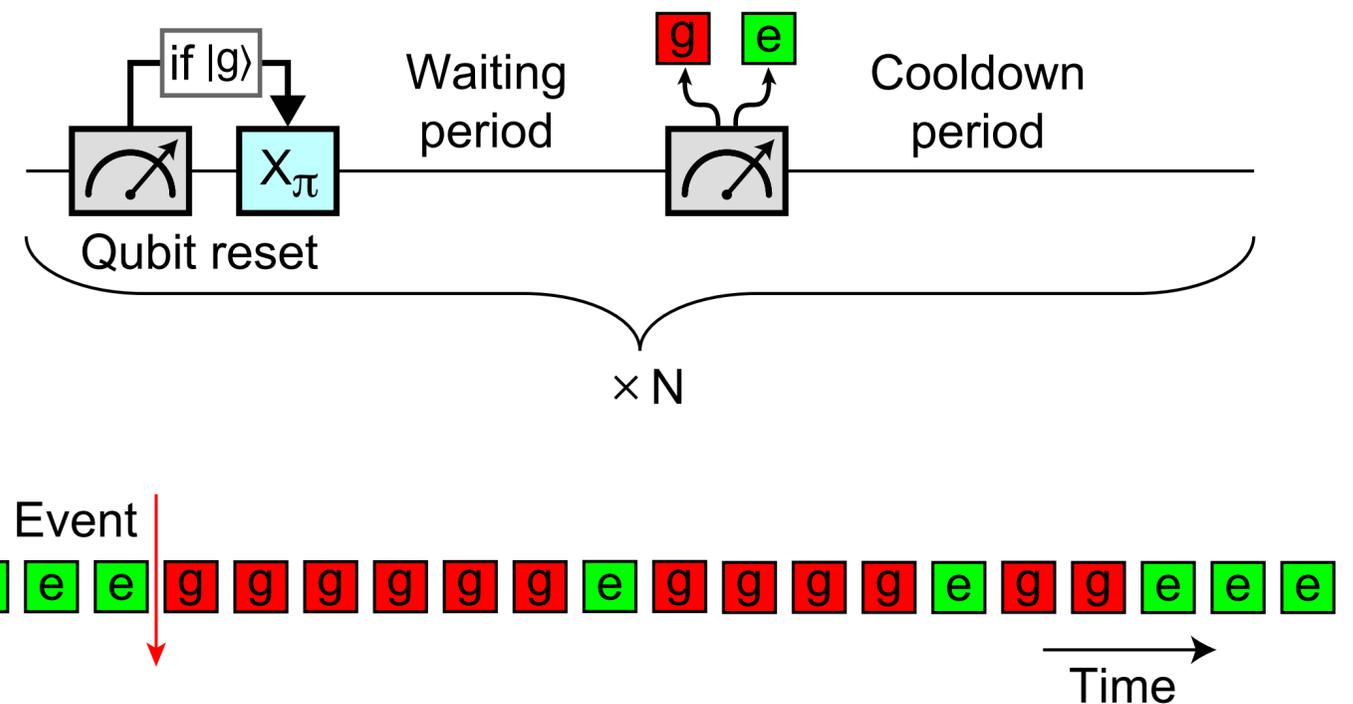


De Dominics et al., arXiv:2405.18355

Results

- When exposing the qubit to the gamma source we observe streams of $|g\rangle$'s lasting up to almost 50 points;
- These type of events are not observed in the background dataset, and their rate increases with the activity of the source.

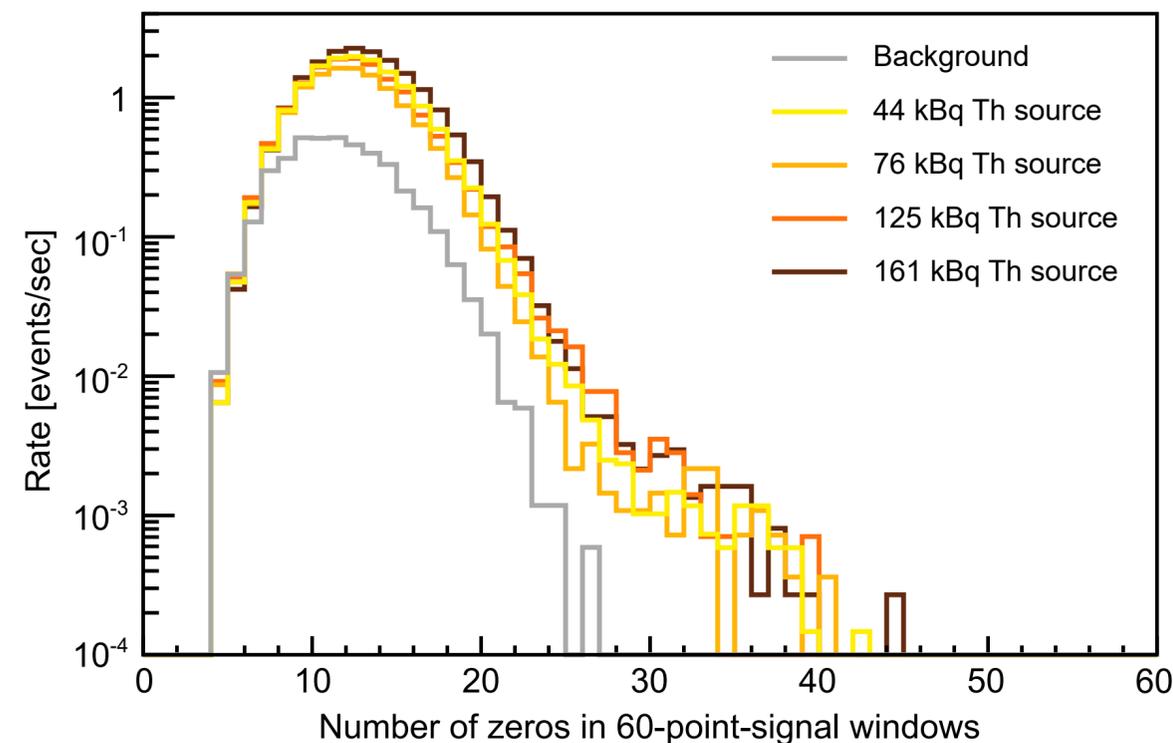


De Dominics et al., arXiv:2405.18355

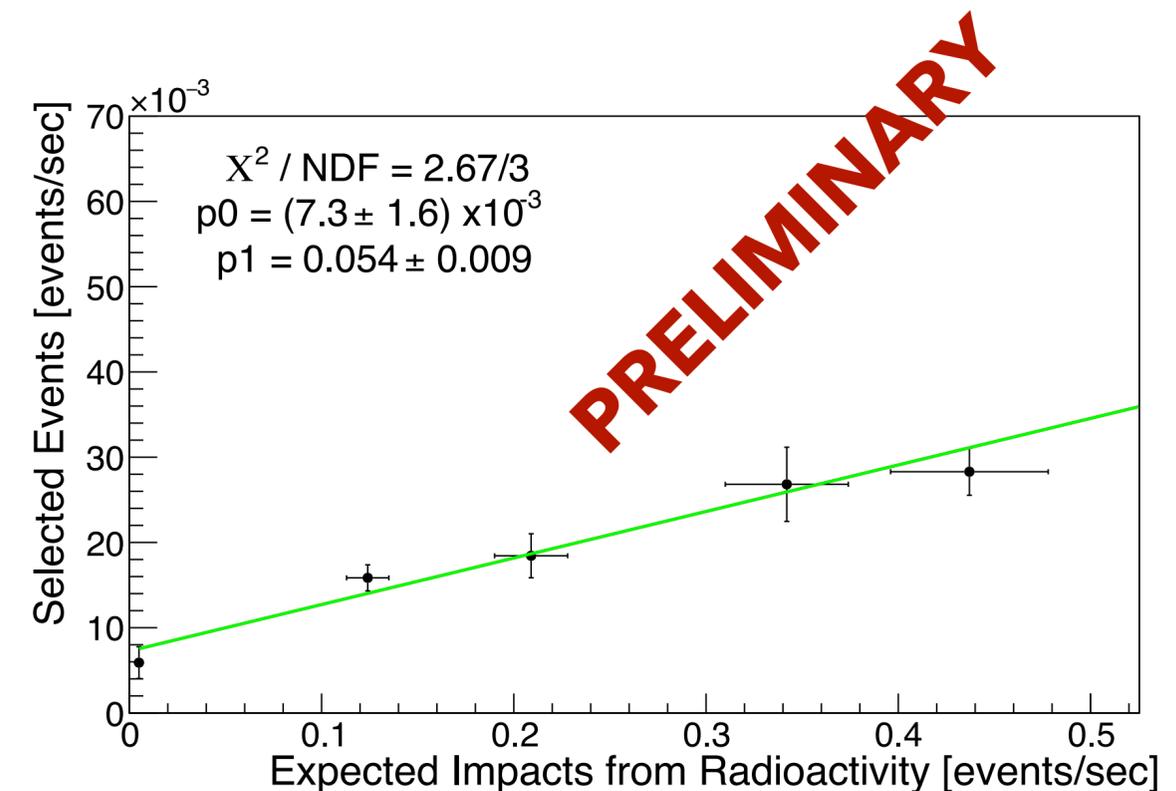

Room for improvement

- Two main limits in this result:
 - The detection efficiency is currently very low (approx. 5%);
 - We are observing a lot of noise events (approx. 0.007 events/s).

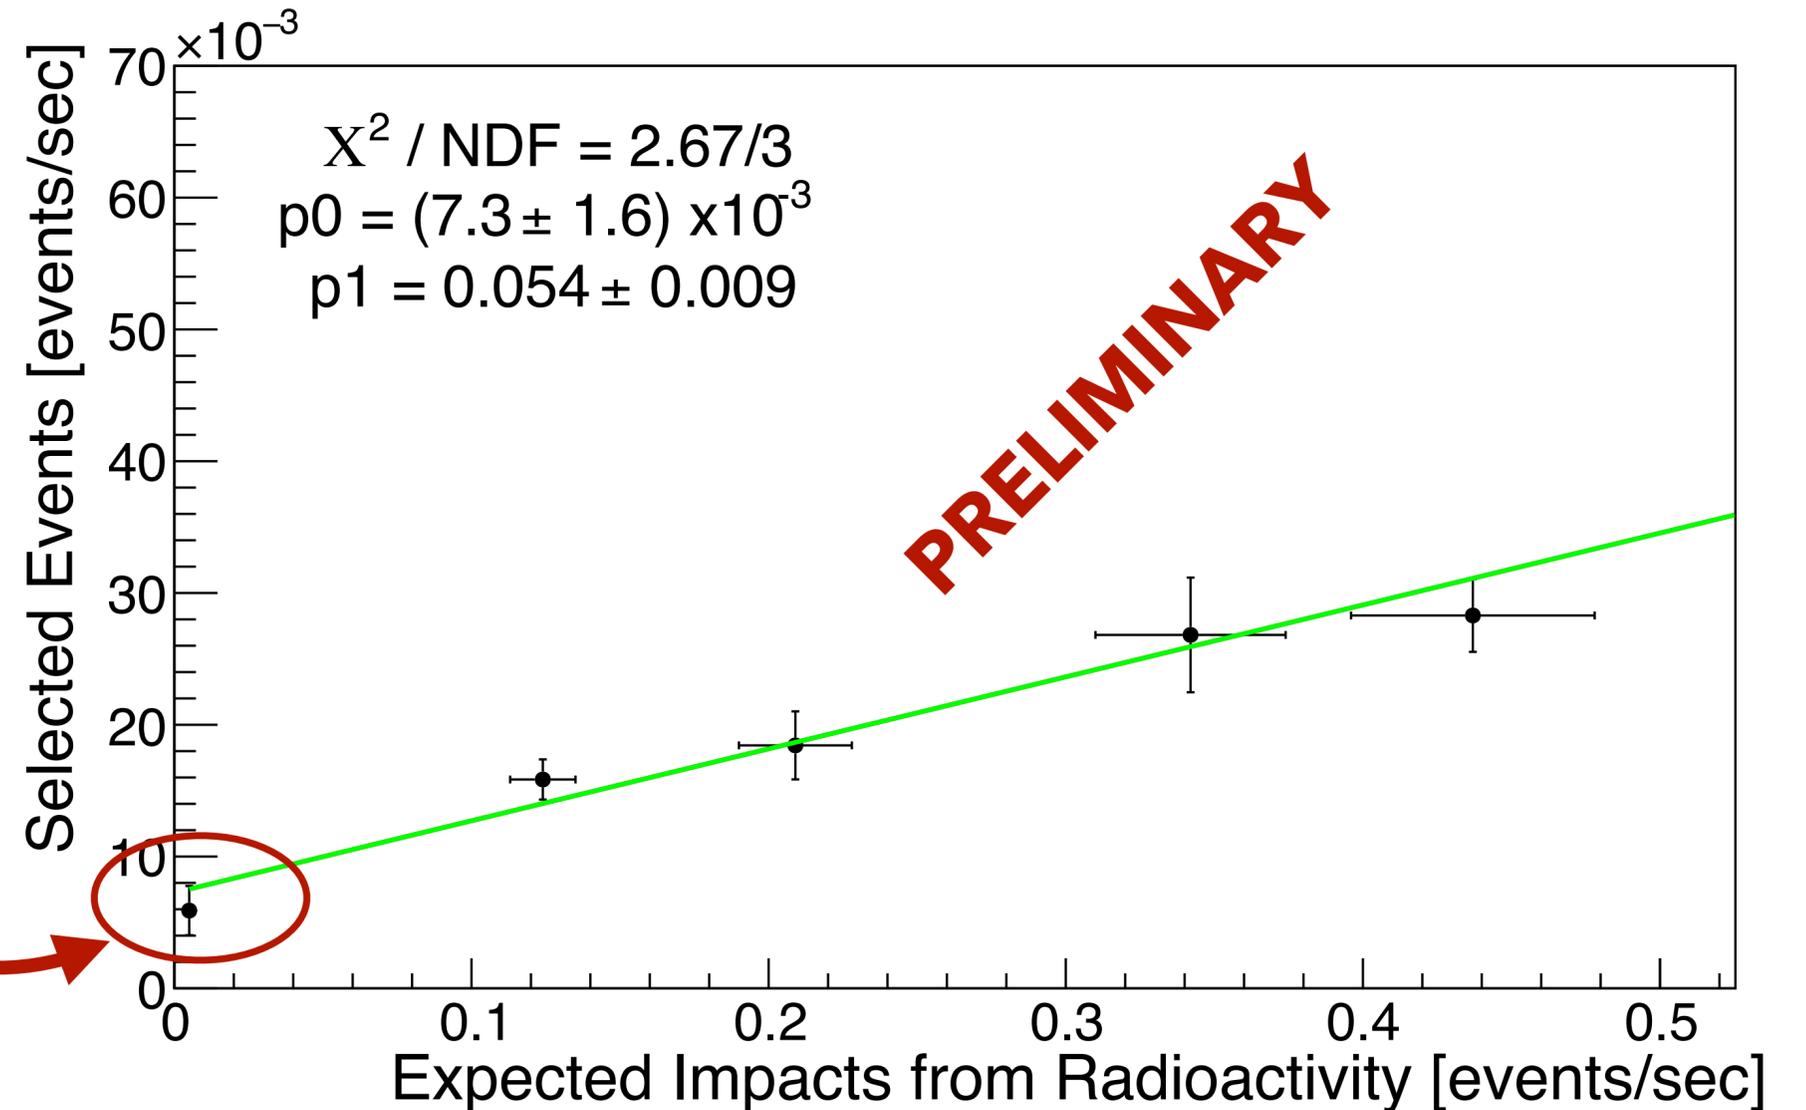

Open questions

- In future measurements we also want to address a lot of questions that are still open:
 - What is the energy threshold for detection?
 - How does the position of the impact affect the detection?
 - How can we estimate the energy deposited in the chip?
 - And so on...

Conclusions

- We successfully operated a superconducting qubit as a gamma detector!
- The detection efficiency is only 8%, but we expect to obtain a much higher value by improving the detection strategy and by properly engineering the qubit;
- We also observe “noise” events which we are currently investigating;

ACKNOWLEDGMENTS



PRIN 2020

<https://cold.unimib.it/home-page>



This work was supported in part by the Italian Ministry of Foreign Affairs and International Cooperation, grant number US23GR09




CONTACTS

Francesco De Dominicis (speaker): francesco.dedominicis@gssi.it

Laura Cardani (head of the group): laura.cardani@roma1.infn.it

Backup: Dispersive Shift Readout



- Qubits are coupled to a LC resonator for state readout;
- The coupling affect the resonance frequency of the resonator, which value depend on the qubit state;
- The qubit state is then determined by measuring that resonance frequency.

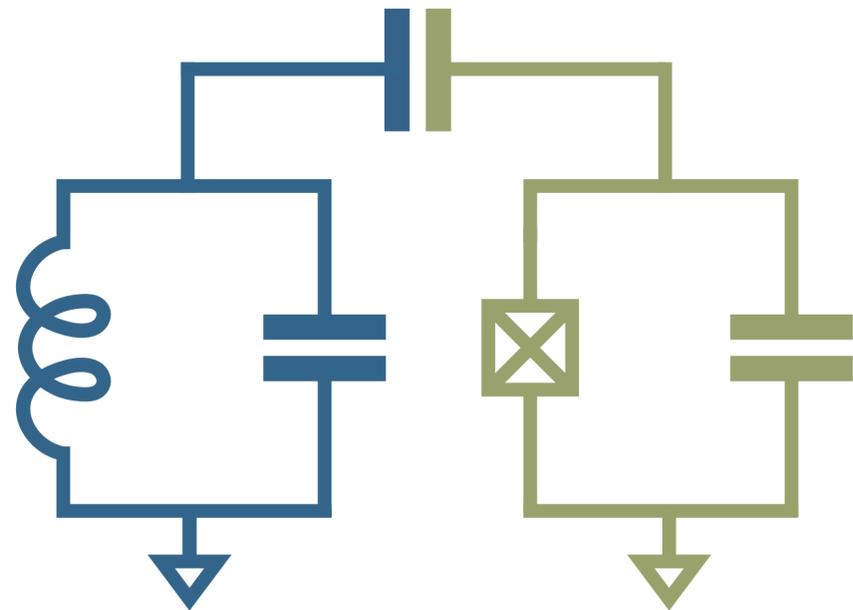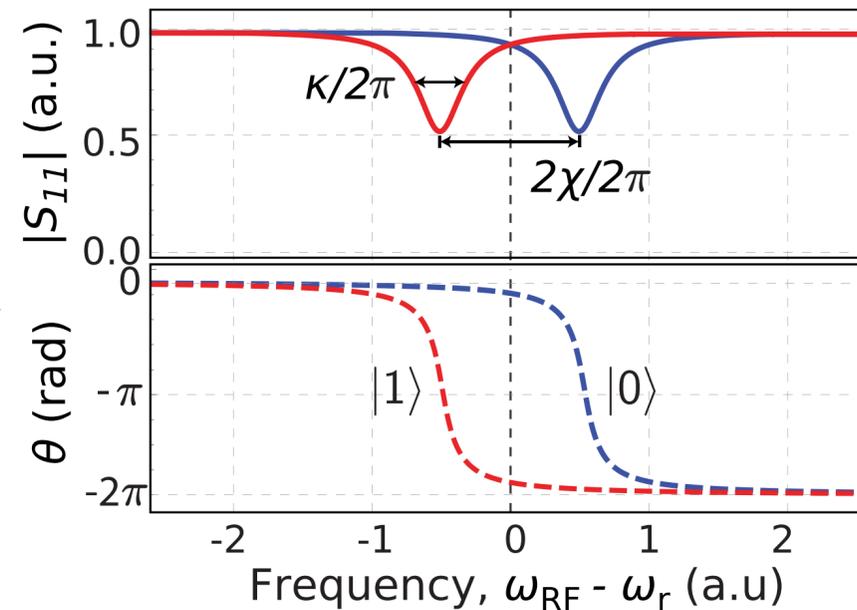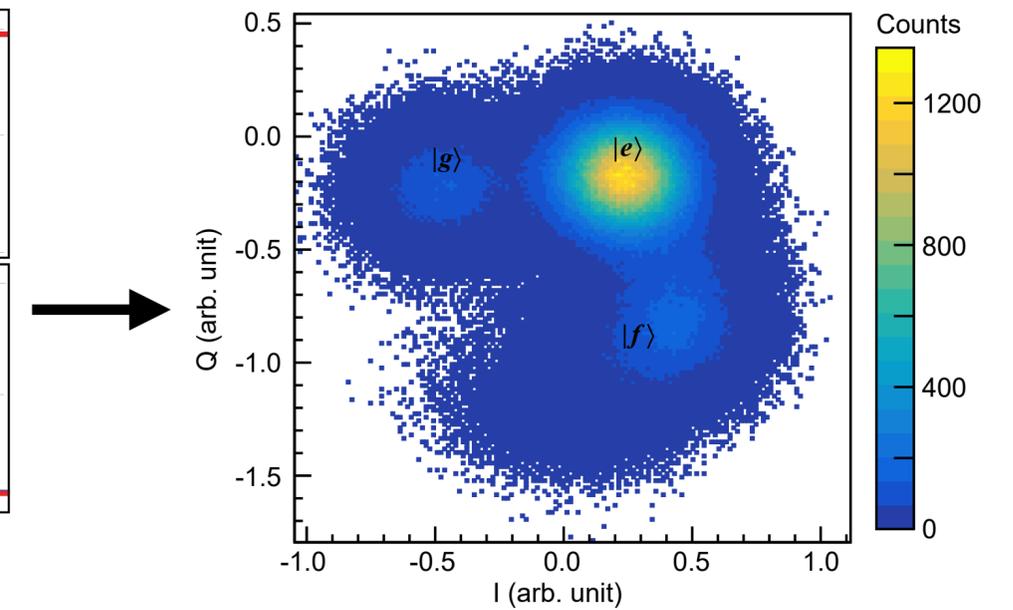
 Blais et al., *Rev. Mod. Phys.* **93**, 025005 (2021)

 Kranz et al., *Appl. Phys. Rev.* **6**, 021318 (2019)


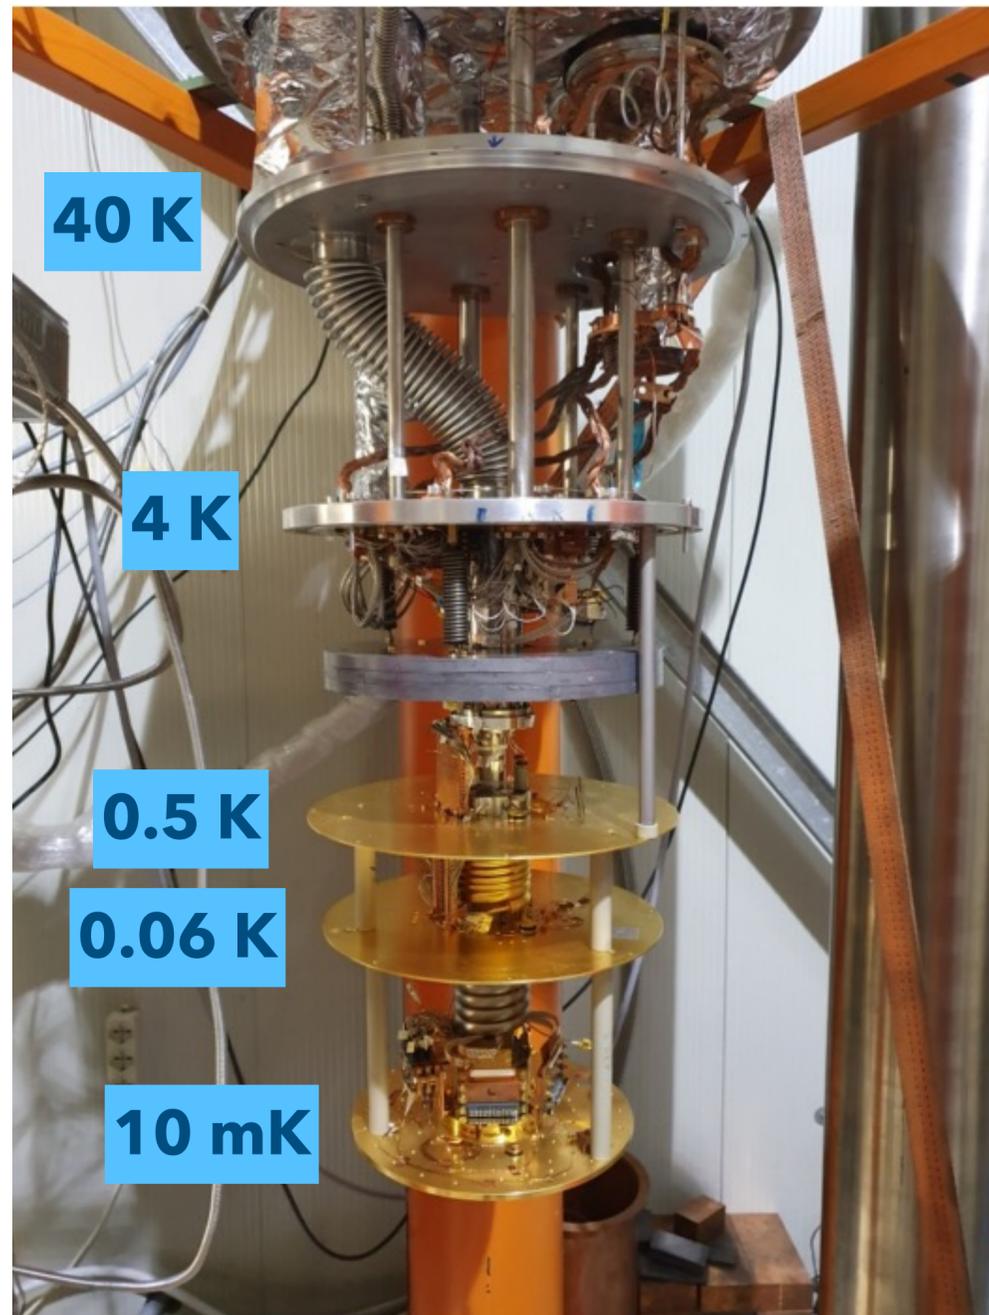
De Dominics et al., arXiv:2405.18355

Backup: The Chip

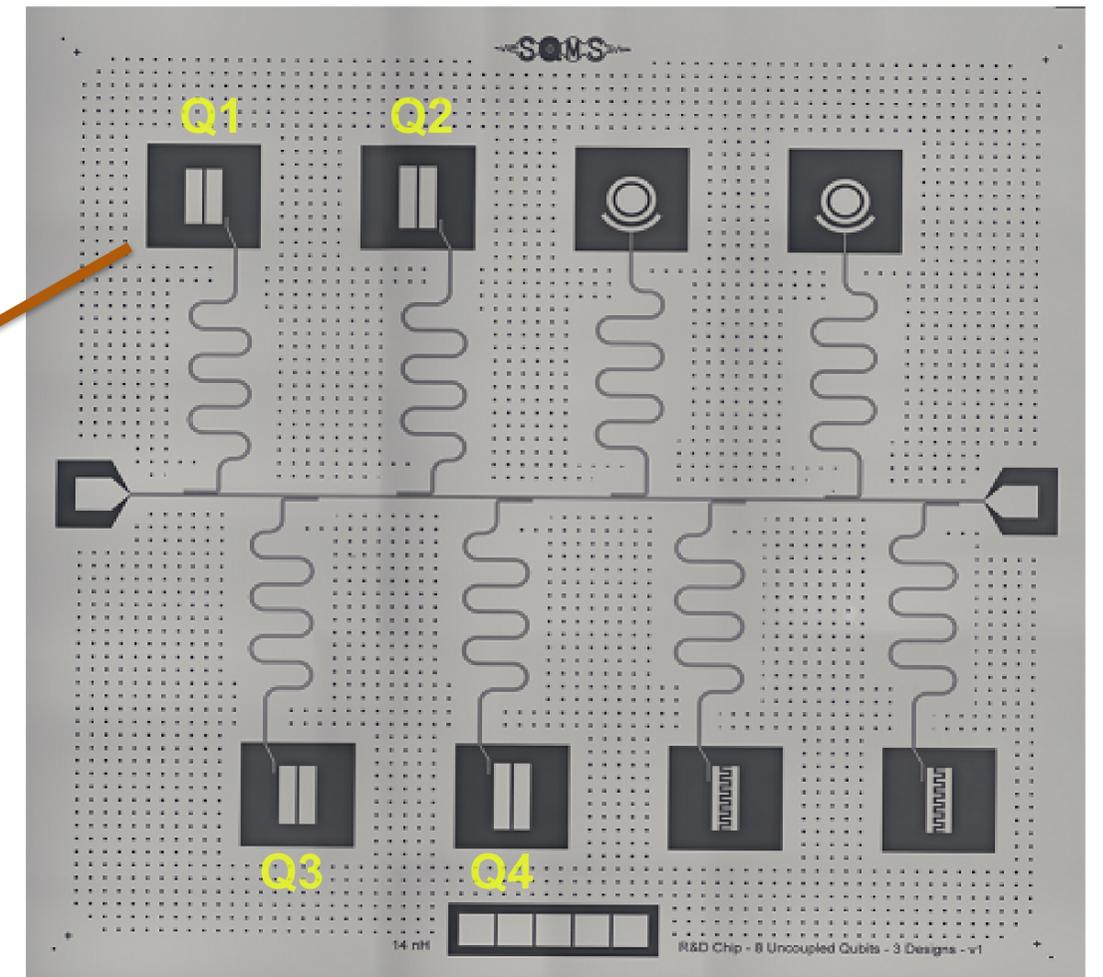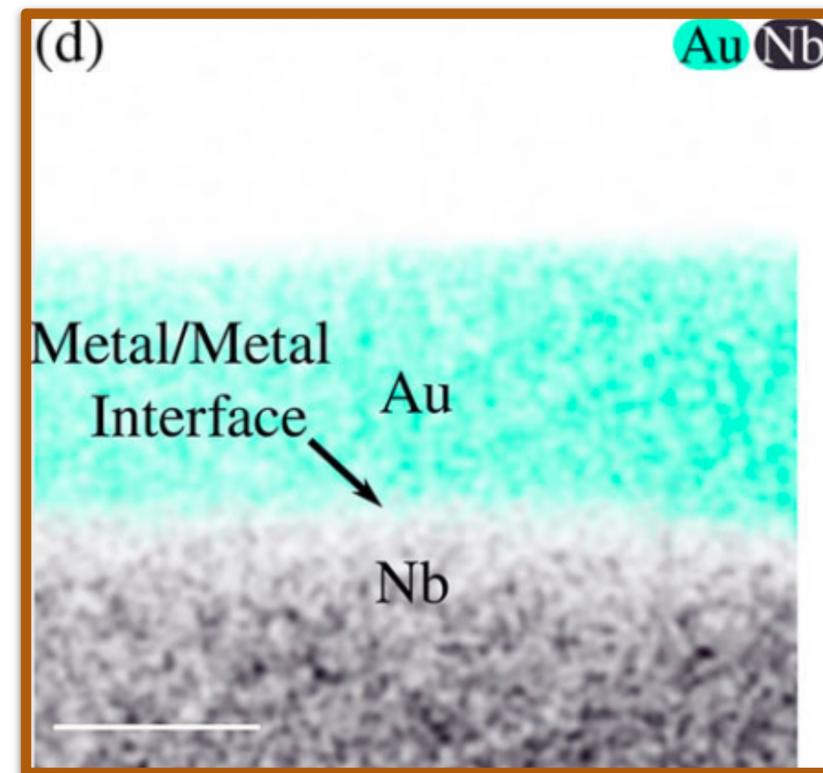- Niobium Transmon qubit on Sapphire substrate;
- Approx. 10 nm Gold capping to prevent losses from the formation of Nb_2O_5 ;
- Median $T_1 = 76 \mu\text{s}$



Backup: the IETI Underground Facility



- Experimental volume: 25 cm diameter, 13 cm height;
- 12 electronics channels with low noise voltage amplifiers (2 nV/ $\sqrt{\text{Hz}}$) (R&D CUPID);
- 3 Magnicon SQUIDs (R&D COSINUS);
- 8 low-attenuation SMA coax cables from room temperature to 4K plus 8 NbTi coax cables from 4K to MC (R&D DEMETRA / SQMS);
- 48 twisted superconducting wires from room temperature to MC;
- A ^{60}Co crystal for absolute thermometry calibration.



<https://ieti.sites.lngs.infn.it/index.html>

Backup: Scheme of the RF lines

